

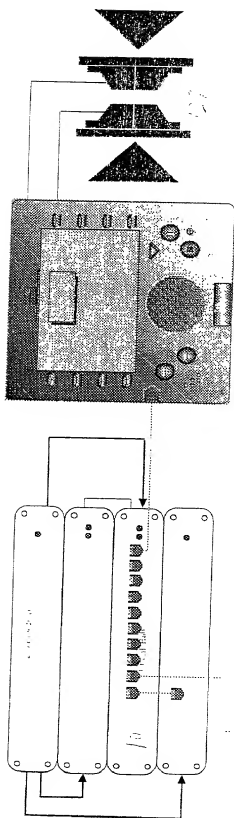


FIG. 1

09849694.050401

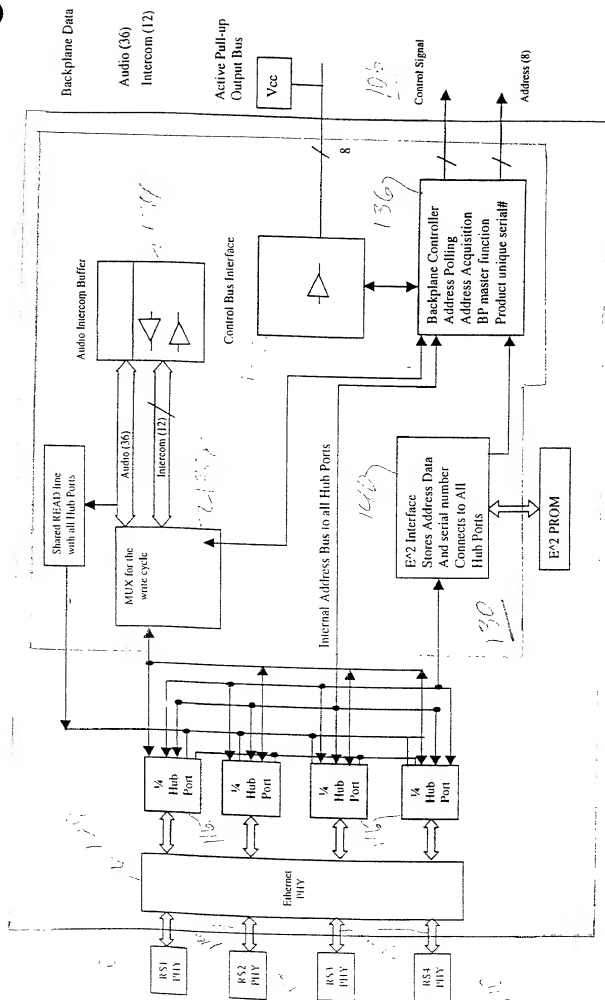

F. 6. 2



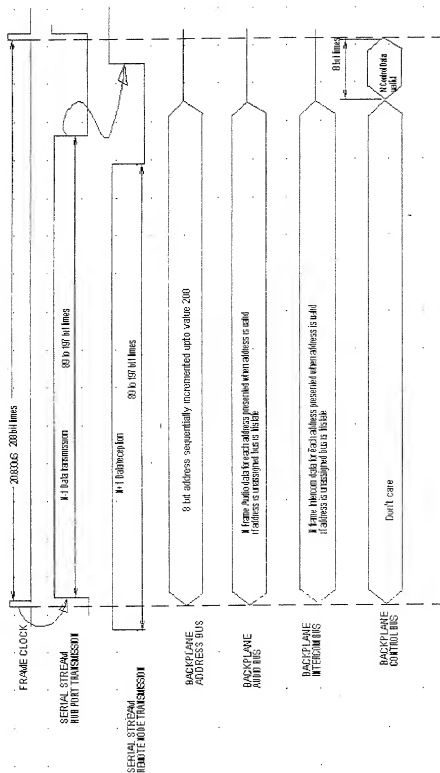


Fig. 4A

Preamble	CBS	Hub control	Data	Icom	Left audio 1	Right audio 1	Left audio 2	Right audio 2	Left audio 3	Right audio 3	Left audio 4	Right audio 4
AAAAABh	cbs	HIC7, HC0	D7 D0	I11... I0	A1L17... A1L0	A1R17... A1R0	A12L0 A2L0	A2R17... A2R0	A3L17... A3L0	A3R17... A3R0	A4L17... A4L0	A4R17... A4R0

Fig. 4B

Mediatoo Initialization Process

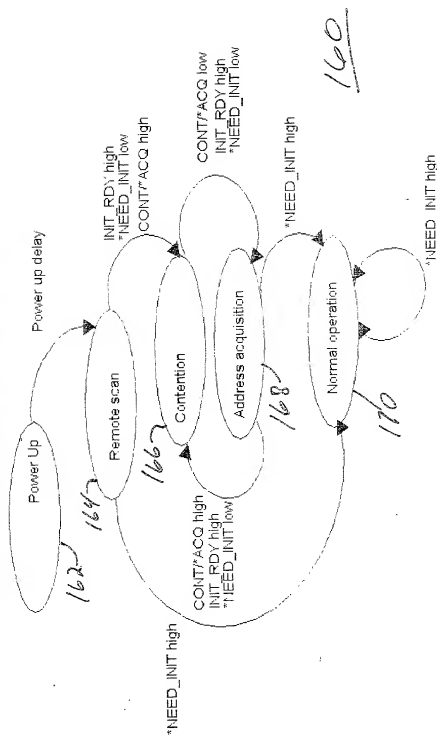


Fig. 6

Control message transmission

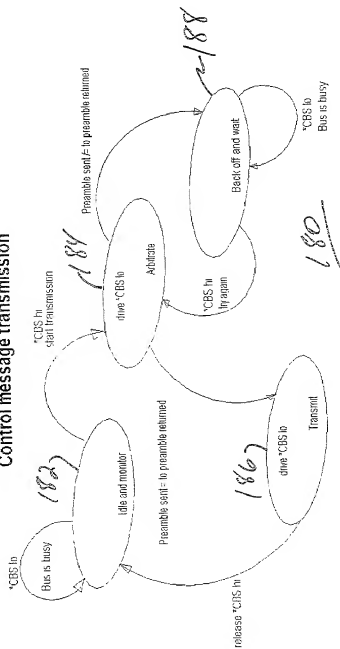


Fig. 7A

Preamble	Destination address	Source address	Number of Bytes in Payload	Payload	Checksum
10 bytes	1 byte	1 byte	2 bytes	0-65Kbytes	2 bytes

Fig. 7B

Control message reception

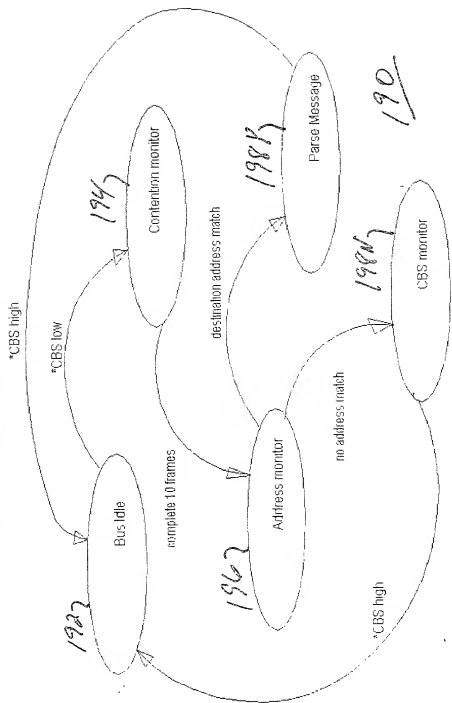
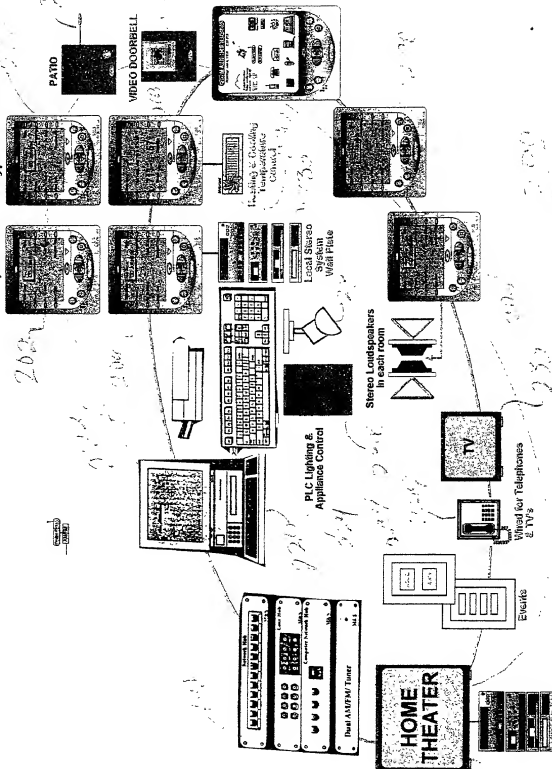


Fig. 8

Amplified Room Keyboards



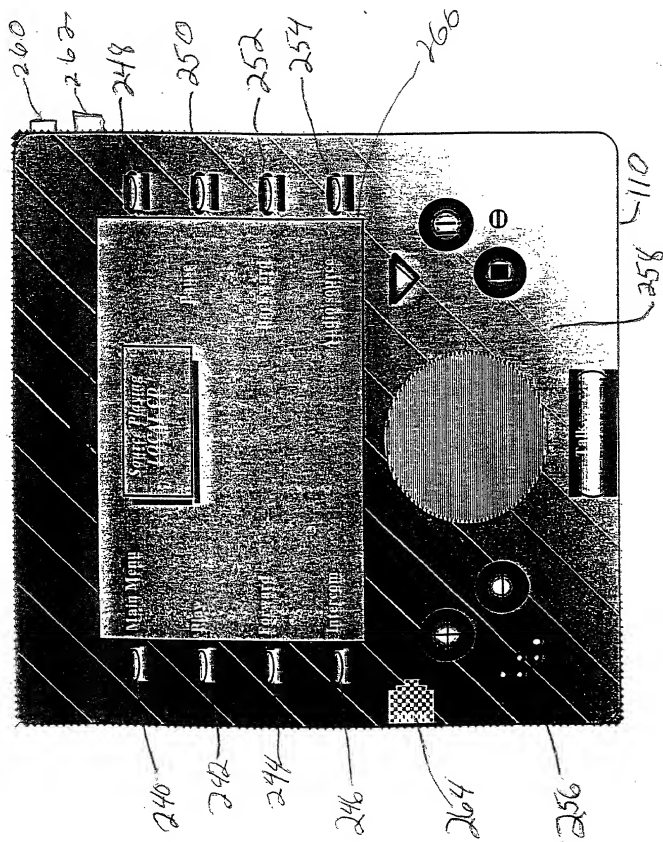


Fig. 10

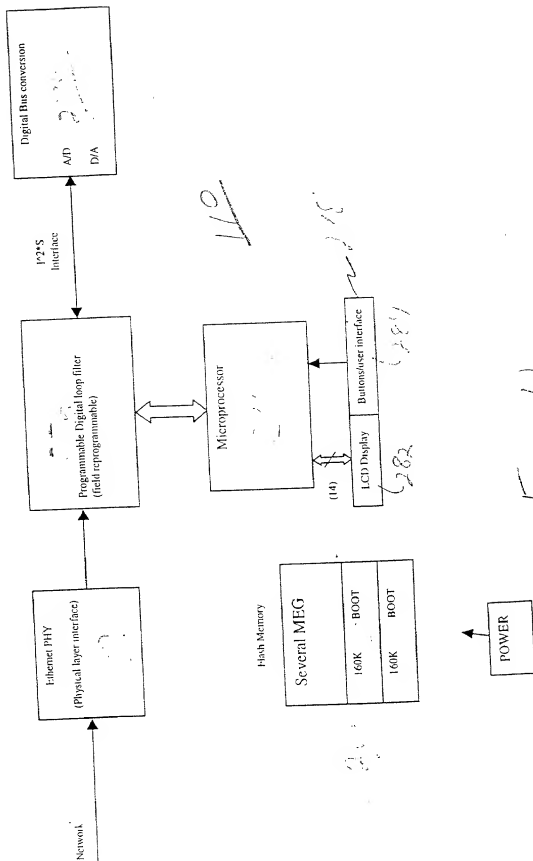


Fig 11

09849694-050401

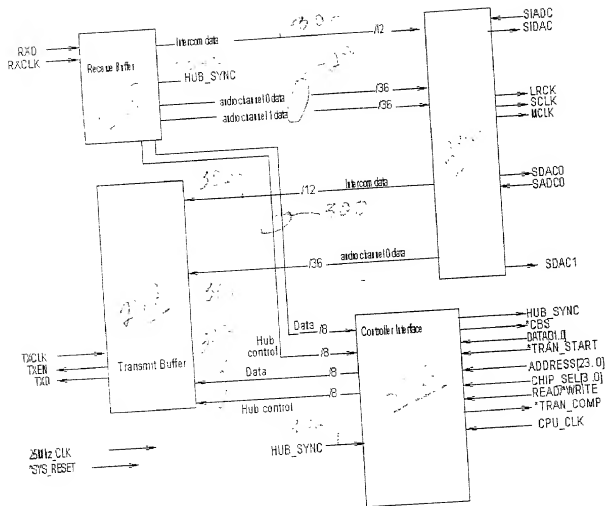


Fig. 10